
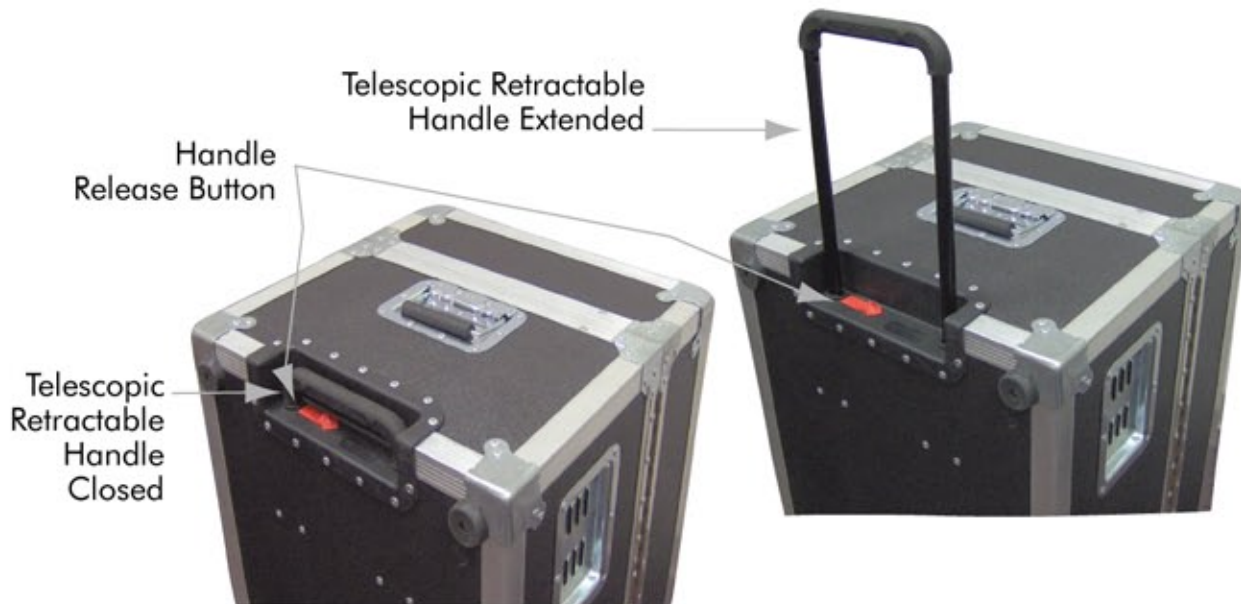


Quick Start Guide

eXpress Case

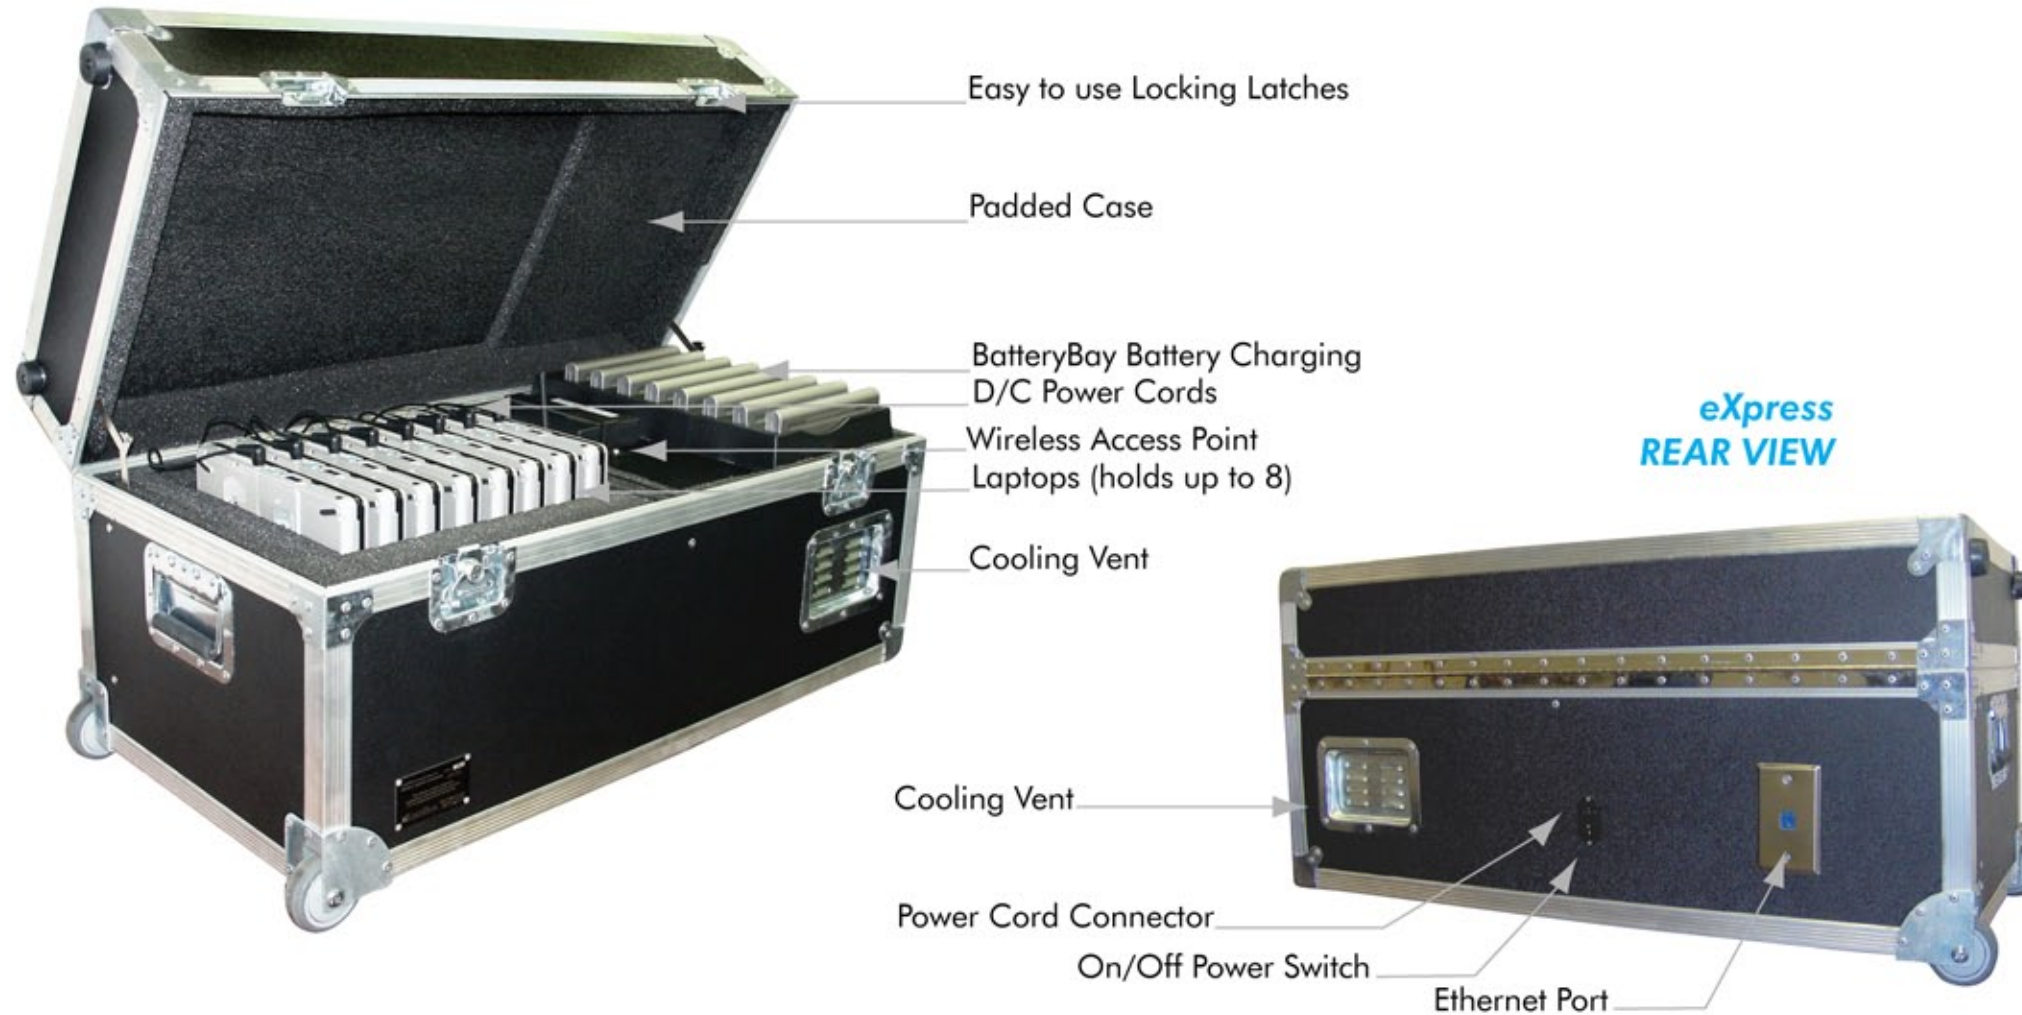

- Make sure the power switch located on rear of the 8x8 eXpress case is in the OFF position. Insert the power cord into the back of the case and into an electrical outlet. Connect your network cable into the Ethernet Uplink.
- The 3" antenna on the side of the access point should be secure and in the upright position. In most cases, the access points will not require reconfiguring to work with your existing network. If your facility has a dedicated wireless infrastructure, or you are going to be using more than one 8x8 in the same immediate area, reconfiguration of the access points may be required. Please refer to the EarthWalk 54Mbps 802.11G Wireless Access Point Quick Installation Guide included in your welcome packet for additional instructions.
- Please be sure to leave the 8x8 eXpress case open at all times while the system is in use for best possible signal strength. (EarthWalk offers an additional Di-Pole antenna that can be attached to the access point to expand signal range.) Do not close the case while charging laptops and/or batteries.
- Carefully insert the laptops into each slot and plug in the power cord. Batteries should be installed in the laptop prior to recharging. Spare batteries should be placed into the BatteryBay for charging prior to use.
- Turn on the 8x8 eXpress case, the instructor's laptop (or desktop PC) and any peripherals to check that all are recognized and computer content can be displayed.
- After you have finished using the 8x8 eXpress case make sure all laptops are shutdown before returning them to their designated charge slots. (If the laptops are left on and the case is closed severe irreversible damage may result.)
- To avoid damage to charging cables make sure they are not left hanging on the sides of the case prior to closing the lid.
- Unplug and place the uplink cable and power cord in the case. Close the lid and turn the turnkeys to ensure the case lid is securely closed and the 8x8 eXpress case is ready to be transported.

Storage

- Batteries should be fully charged, removed and stored separately in a cool dry place for extended periods of inactivity.